END

DATE
FILMED

4-77

1.0

1.1

1.25

4.5
5.0

2.8

3.2

3.6

4.0

2.5

2.2

2.0

1.8

1.4   1.6

MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS 1963

Magnetic-Field-Induced Enhancement of Relativistic-Electron-Beam Energy Deposition

D. MOSHER AND I. B. BERNSTEIN

Plasma Technology Branch
Plasma Physics Division

February 1977

D D C
RECEIVED
APR 4 1977
A

NAVAL RESEARCH LABORATORY
Washington, D.C.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 3441	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) MAGNETIC-FIELD-INDUCED ENHANCEMENT OF RELATIVISTIC-ELECTRON-BEAM ENERGY DEPOSITION.		5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem.
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) D. Mosher and I. B. Bernstein†		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, D.C. 20375		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NRL Problem H02-26A Project DNA T99QAXLA014
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Nuclear Agency Washington, D.C. 20305		12. REPORT DATE February 1977
		13. NUMBER OF PAGES 15
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Relativistic electron beams
Energy-deposition profiles
B-field enhancement

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The collisional transport of relativistic electron beams in dense, magnetized, high-Z plasmas is characterized by a perturbation solution of the relativistic Boltzmann equation with a Fokker-Plank collision term in the limit of small beam-electron mean-free-path or gyroradius. The general formulation allows for arbitrary magnetic-field, electric-field, and plasma geometries. Analytic solutions in 1-D yield energy-deposition profiles for a magnetized plasma slab.
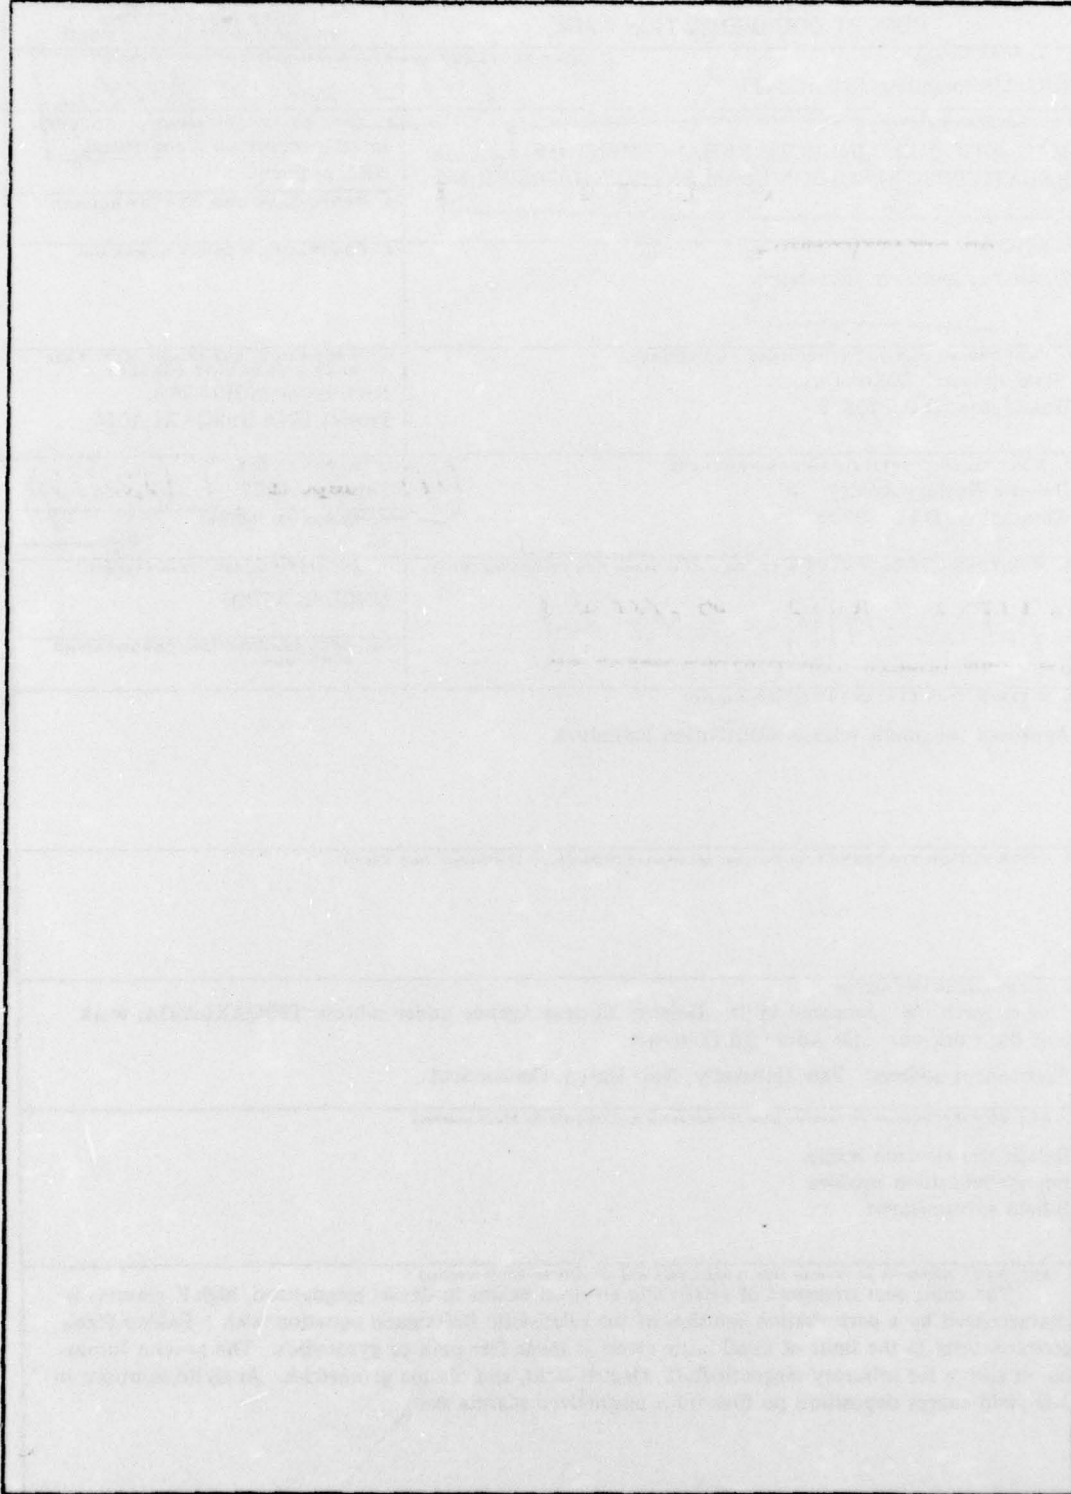
DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE
1 JAN 73
S/N 0102-014-6601

i

MAGNETIC-FIELD-INDUCED ENHANCEMENT
OF RELATIVISTIC-ELECTRON-BEAM ENERGY DEPOSITION

An important area of research associated with the goal of
relativistic-electron-beam-initiated fusion in pellet targets has been
the investigation of techniques to reduce the energy-deposition length
of the beam in dense matter.[1] Attention has been devoted to this
question because the long deposition lengths of MeV-energy electrons
require beam powers for fusion[2] which are technologically difficult to
achieve. A reduction in deposition length in the target plasma might
be affected by the presence of a strong self- or external-magnetic
field transverse to the beam-current direction.[3]

Here, a perturbation procedure[4] is used to solve the relativistic
Boltzmann equation with a Fokker-Planck collision term[5] in order to
characterize the collisional transport of relativistic electron beams
in magnetized, high-atomic-number plasmas. The analysis is valid for
arbitrary magnetic-field and plasma-parameter variations provided that
macroscopic scale lengths are large compared to either a beam-electron
scattering length or gyroradius. The ordering of smallness parameters
results in a diffusion-like equation for the energy distribution func-
tion of beam electrons involving the electric field and dynamic fric-
tion. Explicit one-dimensional solutions are then used to determine

1

the manner in which the deposition of electron energy changes with
transverse magnetic field strength. Finally, the applicability of this
mechanism to current experiments and fusion systems is discussed.

The equation describing the momentum distribution function of
relativistic electrons interacting with a high-atomic-number plasma
may be written[5]

$$\frac{\partial f}{\partial t} + \frac{\vec{p}}{m\gamma} \cdot \vec{\nabla} f - e\left(\vec{E} + \frac{\vec{p} \times \vec{B}}{m\gamma}\right) \cdot \vec{\nabla}_p f = \vec{\nabla}_p \cdot [\nu_S(p)(p^2 \vec{\vec{I}} - \vec{\vec{pp}}) \cdot \vec{\nabla}_p f] + \vec{\nabla}_p \cdot [\nu_E(p) \vec{p} f]$$

(1)

where $\gamma^2 = 1 + p^2/(mc)^2$. The quantities ν_S and ν_E are scattering and
energy-loss frequencies:

$$\nu_S = \Omega_S \gamma/(\gamma^2 - 1)^{3/2}, \qquad \nu_E = \epsilon \gamma \nu_S ,$$

(2)

where $\Omega_S = 2\pi n_i r_o^2 c(Z^2 + Z)\ln\Lambda$ and $\epsilon = 2/(Z+1) \ll 1$. Here, n_i is the
plasma ion density, r_o is the classical electron radius, c is the veloc-
ity of light, Z is the plasma atomic number, and $\ln\Lambda$ is of order 10.
Since electron diffusive-relaxation times through the dense plasma are
much shorter than the time over which macroscopic beam parameters vary,
the time-derivative term may be neglected. In keeping with the diffu-
sion ordering, the $\vec{\nabla} f$ and electric-field terms are considered to be of
order $\epsilon^{\frac{1}{2}} \nu_S$. The magnetic-field term is taken as comparable to ν_S for
generality.

With the ordering just discussed, the zero-order equation takes
the form

$$-\frac{e}{m\gamma} \vec{p} \times \vec{B} \cdot \vec{\nabla}_p f_o = \nu_S \vec{\nabla}_p \cdot [(p^2 \vec{\vec{I}} - \vec{\vec{pp}}) \cdot \vec{\nabla}_p f_o]$$

(3)

where $f = f_0 + f_1 + f_2 + \dots$, f_1 is of order $\epsilon^{\frac{1}{2}} f_0$, f_2 of order ϵf_0, etc. Equation (3) is satisfied only by a function which is isotropic in momentum space, i.e. $f_0(\vec{p},\vec{x}) = f_0(p,\vec{x})$. To see this, $\vec{p}$ is written in terms of the spherical coordinates (p,θ,φ) with the polar axis parallel to $\vec{B}$. Expanding f_0 in terms of the surface harmonics $Y_\ell^m(\theta,\varphi)$ and substituting to Eq. (3) results in a solution only for $m = \ell = 0$. Thus, f_0 is isotropic. Isotropic f_0 is confirmed by sophisticated particle codes which have demonstrated that tightly-pinched electron beams have this character.[6]

The first-order equation then is

$$\vec{p} \cdot \left(\frac{1}{m\gamma} \vec{\nabla} f_0 - \frac{e\vec{E}}{p} \frac{\partial f_0}{\partial p} \right) = \nu_S \vec{\nabla}_p \cdot [(p^2 \vec{\vec{I}} - \vec{pp}) \cdot \vec{\nabla}_p f_1] + \frac{\Omega_0}{\gamma} \vec{p} \times \hat{b} \cdot \vec{\nabla}_p f_1$$

(4)

where $\hat{b} = \vec{B}/B$ and $\Omega_0 = eB/m$. The non-relativistic form of Eq. (4) has been solved.[4] The solution follows from inspection of reference 4.

$$f_1 = - \frac{1}{2\nu_S} \vec{p} \cdot \vec{\vec{M}} \cdot \left(\frac{1}{m\gamma} \vec{\nabla} f_0 - \frac{e\vec{E}}{p} \frac{\partial f_0}{\partial p} \right)$$

(5)

where

$$\vec{\vec{M}} = \hat{b}\hat{b} + \frac{1}{1+\alpha^2} (\vec{\vec{I}} - \hat{b}\hat{b}) + \frac{\alpha}{1+\alpha^2} \hat{b} \times \vec{\vec{I}}$$

(6)

and $\alpha = \Omega_0/2\gamma\nu_S$. The equation for $f_0(p,\vec{x})$ is determined by integrating Eq. (1) over the momentum-space solid angle and keeping terms to lowest significant order.[4] This procedure results in

$$\left(\frac{1}{m\gamma}\vec{\nabla} - \frac{e\vec{E}}{p}\frac{\partial}{\partial p}\right)\cdot\left[\frac{p^3}{6\nu_S}\overset{\rightrightarrows}{M}\cdot\left(\frac{1}{m\gamma}\vec{\nabla}f_0 - \frac{e\vec{E}}{p}\frac{\partial f_0}{\partial p}\right)\right] + \frac{1}{p}\frac{\partial}{\partial p}\left(\nu_E p^3 f_0\right) = 0 \qquad (7)$$

In the limit of $\Omega_o = 0$, Eqs. (5) and (7) reduce to published results.[7]

The interesting macroscopic quantities derivable from solution of Eqs. (5) and (7) are the particle flux $\vec{\Phi}$ and heat flux $\vec{q}$. These are defined by

$$\left\{\begin{matrix}\vec{\Phi}\\\vec{q}\end{matrix}\right\} = \int\left\{\begin{matrix}1\\mc^2(\gamma-1)\end{matrix}\right\}\frac{\vec{p}}{m\gamma}f_1 d^3p \qquad . \qquad (8)$$

Taking the divergence of Eq. (8), substituting from Eq. (7), and integrating by parts over p results in the relations

$$\vec{\nabla}\cdot\vec{\Phi} = -4\pi\epsilon\,\Omega_S(mc)^3 f_0(o,\vec{x}) \qquad (9)$$

$$Q = -\vec{\nabla}\cdot\vec{q} = e\vec{E}\cdot\vec{\Phi} + 4\pi\epsilon\,\Omega_S(mc)^3\cdot mc^2\int\gamma^2 f_0 d\gamma \qquad . \qquad (10)$$

The particle "sink" in Eq. (9) represents the merging of beam electrons with the plasma background once they have been slowed by dynamic friction to low energies. The quantity Q is the volumetric heating rate of plasma due to both ohmic and collisional beam-energy losses.

One-dimensional solutions in a slab geometry from which $\vec{\Phi}$ and Q can be determined explicitly are now considered. A monoenergetic ($\gamma = \gamma_o$) electron beam of particle flux Φ_o is assumed incident on a uniform plasma occupying the half-space $x \geq 0$. A uniform magnetic field of arbitrary strength aligned parallel to the plane $x = 0$ is imbedded in the plasma.

4

Equation (9) in one dimension states that the beam flux decays
with x so that in order to maintain charge conservation, a plasma-
electron current-density $j(x) = e(\Phi - \Phi_o)$ must flow. An electric field
$E(x) = \eta j$, η being the plasma resistivity, must then exist. The
importance of E to evaluation of f_o is determined by comparing the
magnitude of the $\vec{\nabla} f_o$ and electric-field terms in Eq. (4). It is now
shown that E is negligible for problems of interest, i.e. that
$eE \ll m_o c^2 \gamma_o \chi^{-1}$, where χ is the scale over which f_o varies. Since
$E \leq e \eta \Phi_o$, and $\chi \leq c/\epsilon^{\frac{1}{2}} \Omega_S$ for electron energies of interest[8], the above
condition is satisfied if $e \eta \Phi_o \ll \epsilon^{\frac{1}{2}} m_o c^2 \gamma_o \Omega_S / e$. Substituting numerical
values and assuming classical resistivity it is found that the electric-
field is negligible when

$$e \Phi_o \ll 3 \times 10^{10} \left(\frac{n_i}{n_S} \right) \theta^{3/2} / Z_i \quad \text{Amps}/\text{cm}^2 \quad . \tag{11}$$

In this expression, n_i/n_S is the ratio of plasma-ion to solid density,
θ is the plasma temperature in eV and Z_i is it's ionization level. The
numerical coefficient is appropriate for a gold plasma. This condition
is satisfied for electron beams of interest so that the electric field
can be ignored for determination of f_o.

With the simplifications discussed, Eq. (7) reduces to

$$a^2 \frac{\partial^2}{\partial x^2} (\gamma^2 f_o) + \left[\frac{\gamma^4}{(\gamma^2 - 1)^3} + \frac{\Omega_o^2}{4 \Omega_S^2} \right] \frac{\partial}{\partial \gamma} (\gamma^2 f_o) = 0 \tag{12}$$

where $a^2 = c^2/6 \epsilon \Omega_S^2$. This relation takes the form of a simple diffusion
equation with the change of variable

$$\tau(\gamma) = \int_{\gamma}^{\gamma_0} \left[\frac{\gamma^4}{(\gamma^2-1)^3} + \frac{\Omega_0^2}{4\Omega_S^2} \right]^{-1} d\gamma \quad . \tag{13}$$

for which the second term in Eq. (12) reduces to $-\partial(\gamma^2 f_0)/\partial\tau$.
The solution corresponding to monoenergetic f_0 at $x = 0$ is[8]

$$\gamma^2 f_0 = \Psi_0 \frac{x}{(2\pi)^{\frac{1}{2}} a\tau^{3/2}} \exp\left(-\frac{x^2}{4a^2\tau}\right)$$

with Ψ_0 determined from the solution of Eq. (9) and the condition that
$\Phi(0) = \Phi_0$.

In the limit of large $\Omega_0^2/4\Omega_S^2$, τ can be approximated by
$\tau \simeq 4\Omega_S^2(\gamma_0-\gamma)/\Omega_0^2$ for which Eq. (10) can be integrated to give the
deposition profile in a strong magnetic field

$$\frac{Q(x)}{\int_0^\infty Q dx} = \pi^{\frac{1}{2}} k \cdot erfc(kx) ; \qquad k = \frac{\Omega_0}{4\Omega_S(\gamma_0-1)^{\frac{1}{2}}a} \quad . \tag{14}$$

This form is accurate for $\Omega_0/\Omega_S \geqslant 8\gamma_0^2/(\gamma_0^2-1)^{3/2}$. For lower magnetic
fields, $Q(x)$ is determined by numerical integrations of Eqs. (10) and
(13). Results are displayed in Fig. 1 for $\gamma_0 = 3$. The case $\Omega_0/\Omega_S = 3$
results in a profile indistinguishable from Eq. (14).

The magnetic-field-induced enhancement in peak heating rate (or
reduction in deposition length) above that due to dynamic friction
alone can be estimated from Eq. (12) by identifying the character-
istic deposition length Δ

$$\Delta(\Omega_0) = a \left[\frac{\gamma_0^4}{(\gamma_0^2-1)^3} + \frac{\Omega_0^2}{4\Omega_S^2} \right]^{-\frac{1}{2}} \quad . \tag{15}$$

6

Then,

$$\frac{Q_M(\Omega_o)}{Q_M(0)} \approx \frac{\Delta(0)}{\Delta(\Omega_o)} = (1+A)^{\frac{1}{2}} \; ; \quad A = \frac{\Omega_o^2(\gamma_o^2-1)^3}{4\Omega_S^2\gamma_o^4} \; . \tag{16}$$

The numerical results show that this relation is valid to within about 10% for all values of Ω_o for 1 MeV incident electrons.

It is of interest to determine whether magnetic enhancement of energy deposition is operational in current experiments and scalable to fusion conditions. This is best accomplished by numerically solving Eq. (7) with $\vec{M}$ determined from the azimuthal self-field of the pinched beam or by employing Monte-Carlo techniques.[3] However, when the beam radius R exceeds Δ, Eq. (16) with Ω_o determined by B_θ can provide an estimate. Magnetic enhancement is important when $A \gtrsim 1$. This condition is satisfied in the target-plasma blow-off when $B_\theta \gtrsim 2 \times 10^6 n_i/n_S$ gauss for a 1 MeV beam incident on gold. In this case, R exceeds Δ when the beam current exceeds 50 kA. The condition $A > 1$ is then satisfied in current experiments[9,10] provided that the plasma is sufficiently resistive to allow B_θ to diffuse a distance Δ into it. Thus, a necessary condition for deposition enhancement due to self-fields is $\tau > \tau_D = 4\pi\Delta^2/\eta c^2$, where τ is the beam duration. For $A > 1$ in gold, this condition may be written $\tau > 128\theta^{3/2}/Z_i B_\theta^2$. Evaluating τ_D for $\theta = 10$ eV, $Z_i = 5$, and $B_\theta = 2 \times 10^5$ g results in a value of 20 ns. Note that although the diffusion-time condition is satisfied in current experiments, it is not sufficient to insure B-field penetration since plasma expansion can convect field lines away from the dense region where enhanced deposition is desired. Simultaneous solution of the plasma MHD, deposition,

7

and magnetic-diffusion equations in a realistic geometry is required for
a definitive answer to the role of magnetic enhancement in current
experiments. However, at the elevated temperatures required for fusion-
pellet targets, these considerations indicate that it is unlikely that
sufficient self-fields would penetrate the plasma unless anomolous
resistivity were present or unless a significant fraction of the field
could be made to penetrate before plasma heating occurred. This last
situation might occur if the beam were focussed onto the pellet only
after its current has risen close to the maximum value, as is done in
certain experimental configurations.[9] In that case, the unpenetrated
portion of the field must confine the heated plasma in a way which does
not disrupt symmetric implosion of the pellet.

REFERENCES

1. G. Yonas, J. W. Poukey, K. R. Prestwich, J. R. Freeman, A. J. Toepfer, and M. J. Clauser, Nucl. Fusion 14, 731 (1974).

2. M. J. Clauser, Phys. Rev. Lett. 34, 570 (1975).

3. J. A. Halbleib and W. H. Vandervender, IEEE Trans. Nucl. Sci. NS-22, 2356 (1975).

4. I. B. Bernstein in "Advances in Plasma Physics," A. Simon and W. B. Thompson, Ed. (Interscience, New York, 1969), Vol. 3, p. 127.

5. D. Mosher, Phys. Fluids 18, 846 (1975).

6. J. W. Poukey, J. Vac. Sci. Technol. 12, 1214 (1975).

7. D. Mosher, Phys. Rev. Lett. 35, 851 (1975).

8. D. Mosher, "Proc. International Topical Conf. on Electron Beam Research and Technology," Sandia Lab. Rep. SAND76-5122, 171 (1976).

9. A. E. Blaugrund and G. Cooperstein, Phys. Rev. Lett. 34, 461 (1975).

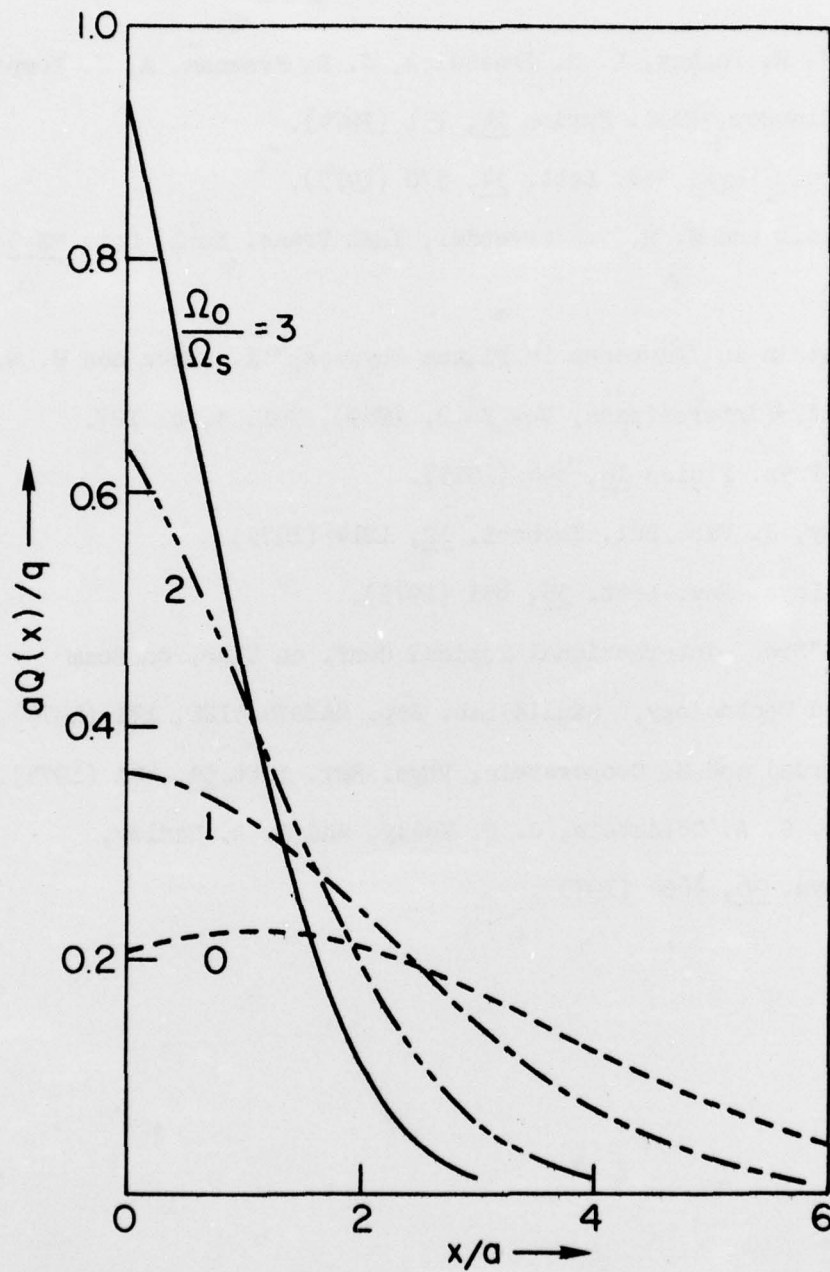10. D. W. Swain, S. A. Goldstein, J. G. Kelly, and G. R. Hadley, J. Appl. Phys. 46, 4604 (1975).

Fig. 1 — Energy deposition profiles of a 1 MeV electron beam incident on a gold plasma slab for various values of transverse magnetic-field strength. The quantity q is the integral of Q over x.

DISTRIBUTION LIST

1. Director
    Defense Advanced Research Projects Agency
    Architect Building
    1400 Wilson Boulevard
    Arlington, Virginia 22209
            Attn: LTC R. P. Sullivan

2. Director
    Defense Nuclear Agency
    Washington, D. C. 20305
            Attn: DDST, Mr. Peter Haas
                   RATN
                   STTL, Technical Library (2 copies)
                   RAEV (2 copies)
                   STVL
                   STSI

3. Commander
    Field Command
    Defense Nuclear Agency
    Albuquerque
    Kirtland AFB, New Mexico 87115
            Attn: FCPR

4. Chief
    Field Command
    Defense Nuclear Agency
    Livermore Division
    Box 808
    Livermore, California 94550
            Attn: FCPR-L

5. Director
    Defense Research and Engineering
    Washington, D. C. 20301
            Attn: DAD (SK) Mr. C. R. Barse

6. Commander
    Harry Diamond Laboratories
    Adelphi, Maryland 20783
            Attn: AMXDO-RBF, Mr. John Rosado
                   AMXDO-RBH, Mr. S. Graybill
                   AMXDO-RC, Dr. Robert Oswald, Chief, LAB 300

1

7. Air Force Weapons Laboratory, AFSC
    Kirtland AFB, New Mexico 87117
                Attn: DY, Dr. Guenther
                        EL, Mr. John Darrah
                        DYS, Dr. Baker
                        SAA
                        SUL, Technical Library
                        ELP, TREE Section

8. Space and Missile Systems Organization
    Post Office Box 92960
    Worldway Postal Center
    Los Angeles, California 90009
                Attn: SKT, Mr. Peter H. Stadler
                        RSP, System Defense and Assessment, LTC Gilbert

9. Sandia Laboratories
    P. O. Box 5800
    Albuquerque, New Mexico 87115
                Attn: Document Control for 5220, Dr. J. V. Walker
                        Document Control for 5242, Dr. G. Yonas
                        Document Control for Technical Library

10. Aerospace Corporation
    P. O. Box 92957
    Los Angeles, California 90009
                Attn: Mr. J. Benveniste
                        Dr. Gerald G. Comisar, Jr.

11. University of Texas
    Fusion Research Center
    Physics Building 330
    Austin, Texas 78712
                Attn: Dr. William E. Drummond

12. Battelle Memorial Institute
    Columbus Laboratories
    505 King Avenue
    Columbus, Ohio 43201
                Attn: Mr. P. Malozzi

13. Maxwell Laboratories, Inc.
    9244 Balboa Avenue
    San Diego, California 92123
                Attn: Dr. P. Korn

14. Mission Research Corporation
    735 State Street
    Santa Barbara, California 93101
                Attn: Dr. Conrad L. Longmire

15. Physics International Corporation
    2700 Merced Street
    San Leandro, California 94577
            Attn: Document Control for Dr. Sidney Putnam
                  Document Control for Mr. Ian Smith

16. R & D Associates
    P. O. Box 9695
    Marina del Rey, California 90291
            Attn: Dr. Bruce Hartenbaum

17. Science Applications, Inc.
    P. O. Box 2351
    La Jolla, California 92037
            Attn: Dr. J. Robert Beyster

18. Stanford Research Institute
    333 Ravenswood Avenue
    Menlo Park, California 94025
            Attn: Dr. Robert A. Armistead, Jr.

19. Dr. Victor A. J. Van Lint
    Mission Research Corporation
    7650 Convoy Court
    San Diego, California 92111

20. Commander
    Naval Surface Weapons Center
    White Oak Laboratory
    Silver Spring, Maryland 20910

21. DASIAC, GE Tempo
    El Paseo Building
    816 State Street
    Santa Barbara, California 93102

22. DDC   (12 copies)

23. Code 2628   (20 copies)

24. Code 7700

25. Code 7770   (20 copies)